


# 310M Universal Beam Clamp, Thick Flange



- Universal beam clamp for thick beams

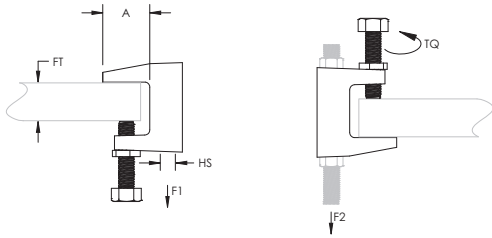

Material: Cast Iron  
Finish: Electrogalvanized



Part Number	Article Number	Hole Size HS	Hole Type	Flange Thickness FT	A	Torque TQ	Static Load 1 F1	Static Load 2 F2
31011MM	598501	11 mm	Plain	31.8 mm Max	28.6 mm	7 N-m	2,200 N	1,100 N
31013MM	598502	13 mm	Plain	31.8 mm Max	28.6 mm	15 N-m	4,200 N	3,300 N

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

FM is a registered certification mark of FM Approvals LLC, LTD. VdS is a registered trademark of VdS Schadenverhütung GmbH.

#### WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

