


Bolt Close Conduit/Pipe Clamp



- Retained bolt and built-in nut means there are less parts to handle or drop
- Combo head bolt works with slotted, hex, #3 phillips or #2 robertson drivers

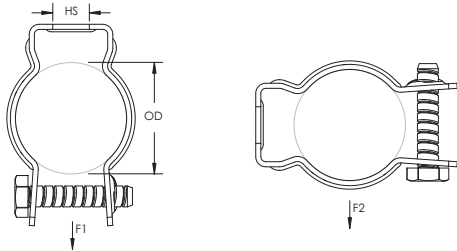

Material: Steel
Finish: Electrogalvanized



Part Number	Article Number	Outer Diameter OD	Hole Size HS	Static Load 1 F1	Static Load 2 F2	Certifications	Standard Packaging Quantity
Nut Type: Built-In Nut							
CD0B	181140	17 – 22 mm	6.4 mm	880 N	220 N	cULus	100 pc
CD1B	181190	19 – 25 mm	6.4 mm	880 N	220 N	cULus, ITB	100 pc
CD2B	181150	25 – 33 mm	6.4 mm	880 N	220 N	cULus	100 pc
CD2.5B	181370	31 – 38 mm	6.4 mm	880 N	220 N	cULus	100 pc
CD3B	181380	36 – 43 mm	6.4 mm	880 N	220 N	cULus, ITB	100 pc
CD4B	181390	45 – 48 mm	9.5 mm	880 N	220 N	cULus, ITB	50 pc
CD5B	181470	49 – 73 mm	7.9 mm	880 N	220 N	cULus, ITB	50 pc
Nut Type: Hex Nut							
CD6B	181480	66 – 76 mm	7.9 mm	1,550 N	220 N	-	25 pc
CD7B	181490	80 – 90 mm	7.9 mm	1,550 N	220 N	-	25 pc
CD8B	181500	95 – 105 mm	7.9 mm	1,550 N	220 N	-	10 pc
CD9B	181540	108 – 115 mm	7.9 mm	1,550 N	220 N	-	10 pc

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

