


Strut Beam Clamp with U-Bolt



- Complete with U-bolt and nuts
- Requires installation in pairs

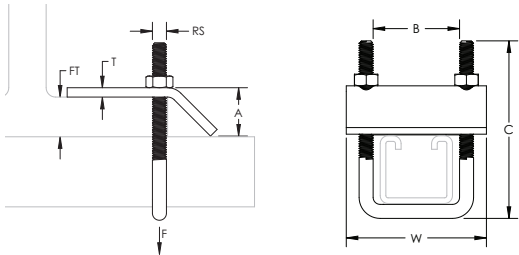

Material: Steel
Finish: Hot-Dip Galvanized

Part Number	Article Number	Strut Type	Rod Size RS	Flange Thickness FT	Width W	Thickness T	A	B	C	Static Load F
ZTA601HD	387701	A (41 x 41 mm) C (21 x 41 mm) CC (41 x 41 mm)	M10	18 mm Max	80 mm	6 mm	24 mm	45 mm	95 mm	5,000 N
ZTA602HD	388006	A (41 x 41 mm) AA (83 x 41 mm) D (62 x 41 mm) E (83 x 41 mm)	M10	18 mm Max	80 mm	6 mm	24 mm	45 mm	140 mm	5,000 N

Static Load is based on one pair of Strut Beam Clamps.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

